


## KW-3571

## Heavy Duty Hook Lock for Sliding Gates

### Description:

The KW-3571 Heavy Duty Hook Lock is a robust and secure locking system engineered for sliding gates. Unlike standard latch or deadbolt locks, the hook design provides deep engagement into the strike plate, preventing the gate from being forced apart or lifted. The security is further enhanced by a 13mm solid bolt, resisting tampering and forced entry. Built for demanding residential, commercial, and industrial applications, this lock delivers long-term durability, maximum protection, and smooth operation in outdoor environments.

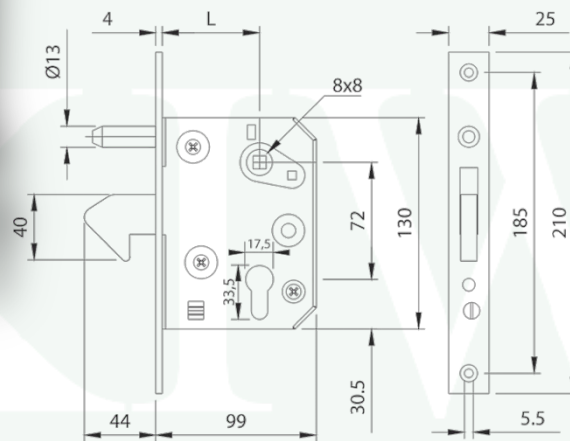

**FIXING:** To be fixed in box section of gate (cylinder + key not provided)

**MATERIAL:**

- Zinc electrogalvanized coated steel lockbox and internal components.
- All zinc electrogalvanized coated materials are coated in accordance with the norm UNI ISO 2081:2018 and are 5.9µm to 10.7µm thick.

**Features:**


- Solid hook and 13mm solid bolt engages deeply with the strike plate to resist pulling or prying.
- Protects against forced entry and prying attacks.
- Long-lasting durability and corrosion resistant finish (Zinc / Electrogalvanized).
- Easy to operate with standard key cylinders.
- Compatible with manually operated gate system.

**Article No.**

**L  
(mm)**

<b>KW-3571.50</b>	<b>50</b>
<b>KW-3571.60</b>	<b>60</b>

Maintenance Frequency		
Low Use <25 Operations/Day	Average Use <50 Operations/Day	High Use >50 Operations/Day
2 Year*	2 Year*	2 Years*
Check for adequate greasing in hook mechanism; Check fixing.		
*This scheme refers to a normal workplace (not marine or particularly aggressive environments).		

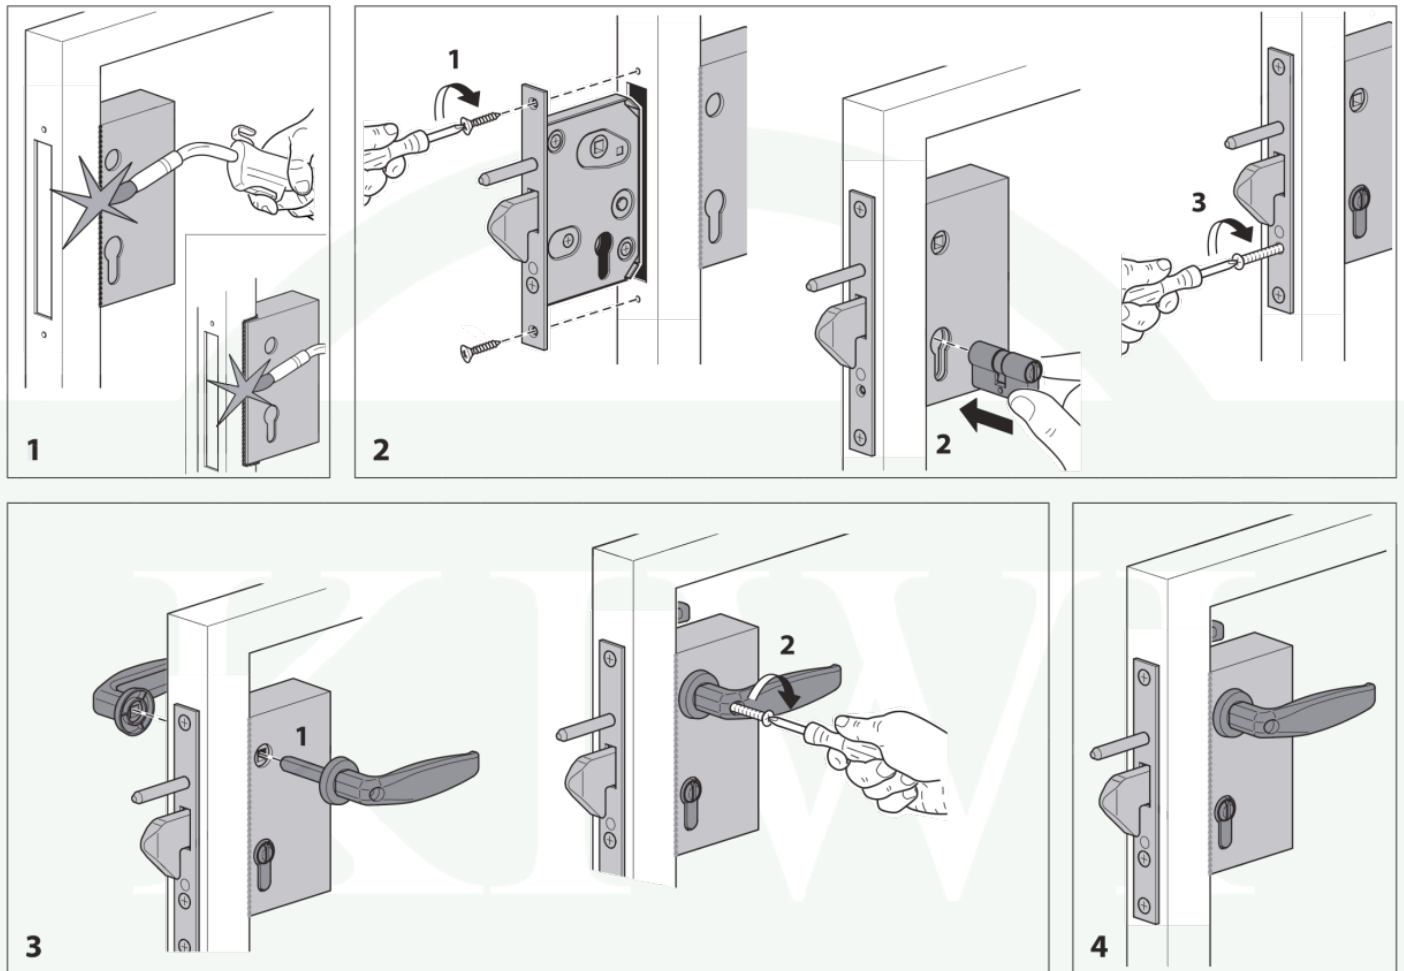

**MAINTENANCE:** To keep this article in optimum efficiency and safety is enough:

- 1) Ensure that the screws are securely fastened after assembly. In any case, check the attachment periodically. Periodically provide adequate grease in hook mechanism.
- 2) If the supports have been subjected to impact caused by moving vehicles or other factors, make sure the article have remained intact, still properly fixed, and that its operation has not been compromised in any way.

**IMPORTANT:** The manufacturer reserves the right to modify the characteristics of the article as required without notice. The manufacturer declines any liability for even partial modifications to the article, and the declared performance values are valid only if the installation procedures are carried out by qualified personnel.