


**KW-810310SS**

**Heavy Duty Wheel with U Groove – Stainless Steel**

**Description:**

Turned Wheels in Stainless Steel Grade 304, single ball bearing with water-tight shield. Fastening to the gate by means of an axle, washer, and nut (included in pack)

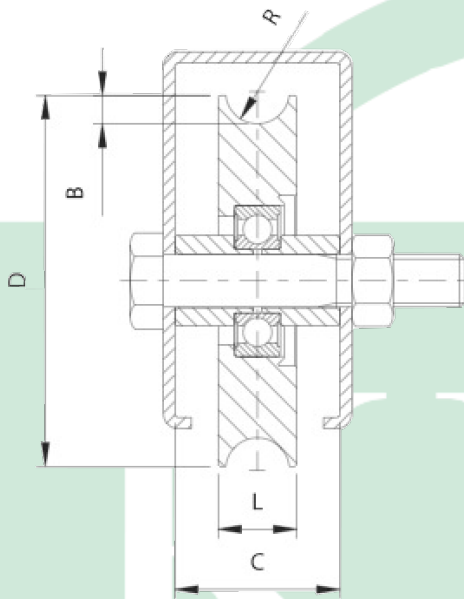


Article No.	B	C	D	L	R	Loading Capacity (KG)	FINISH
	(mm)	(mm)	(mm)	(mm)	(mm)		

<b>KW-810310SS.60.8</b>	4	24	Ø60	16.5	4.5	100	Stainless Steel 304
<b>KW-810310SS.80.20</b>	9.5	34	Ø78	24	10.3	210	Stainless Steel 304
<b>KW-810310SS.100.20</b>	9.5	34	Ø98	24	10.3	240	Stainless Steel 304
<b>KW-810310SS.120.20</b>	9.5	34	Ø117	25	10.3	270	Stainless Steel 304
<b>KW-810310SS.140.20</b>	9.5	44	Ø137	25	10.3	370	Stainless Steel 304
<b>KW-810310SS.160.20</b>	9.5	44	Ø157	25	10.3	400	Stainless Steel 304

**Note:** Production of Stainless Steel Grade 316 available on request

# KW-810310SS

# Heavy Duty Wheel with U Groove – Stainless Steel

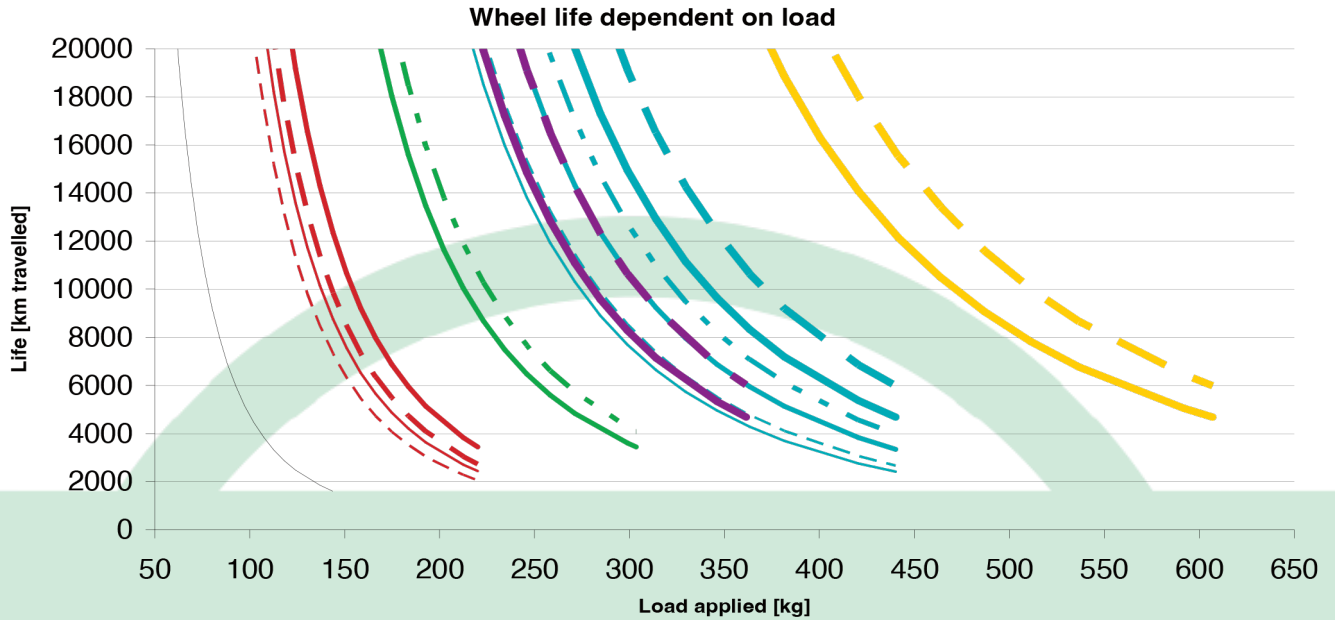

- |  |   |   |
|--|---|---|
| — KW-810310.60.16 - KW-800300V.60                    | - - - KW-810310.80.16 - KW-800300V.80                       | — KW-810310.90.16 - KW-810310.90.20 - KW-800300V.90         |
| — KW-815315.90.16 - KW-815315.90.20<br>KW-805305V.90 | - - - KW-810310.100.16 - KW-810310.100.20<br>KW-800300V.100 | - - - KW-815315.100.16 - KW-815315.100.20<br>KW-805305V.100 |
| — KW-810310.120.16 - KW-800300V.120                  | — KW-810310.120.16.3 (3mm thick groove)                     | — KW-815315.120.20 - KW-805305V.120                         |
| - - - KW-810310.140.16 - KW-800300V.140              | — KW-815315.140.20 - KW-805305V.140                         | — KW-810310.160.16 - KW-800300V.160                         |
| — KW-815315.160.20 - KW-805305V.160                  | — KW-815315.160.20.3 (3mm thick groove)                     | — KW-800300V.200  |
| — KW-805305V.200                                     | — KW-815315.200.20 - KW-805305V.200.3 (3mm thick groove)    |   |

