


**KW-815315SS**

**Heavy Duty Wheel with U Groove – Stainless Steel**

**Description:**

Turned Wheels in Stainless Steel Grade 304, double ball bearing with water-tight shield. Fastening to the gate by means of an axle, washer, and nut (included in pack)

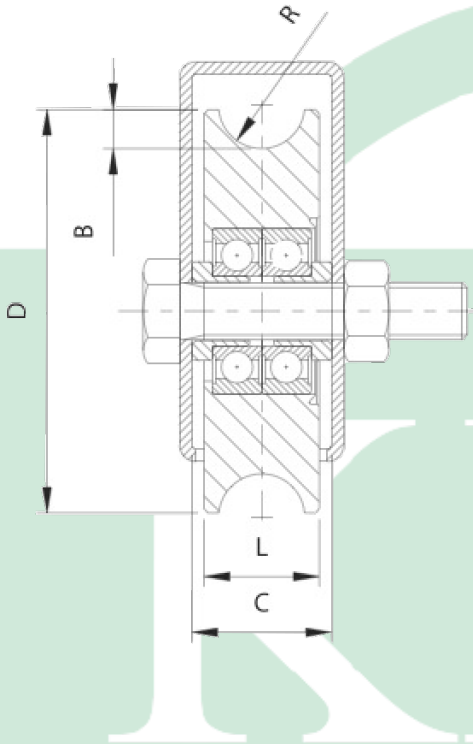


Article No.	B (mm)	C (mm)	D (mm)	L (mm)	R (mm)	Loading Capacity (KG)	FINISH
KW-815315SS.100.20	9.5	34	Ø98	28	10.5	400	Stainless Steel 304
KW-815315SS.120.20	9.5	34	Ø117	28	10.5	420	Stainless Steel 304
KW-815315SS.140.20	9.5	44	Ø137	31	11.5	540	Stainless Steel 304
KW-815315SS.160.20	9.5	44	Ø157	33	11.5	770	Stainless Steel 304
KW-815315SS.200.20	9.5	44	Ø197	33	11.5	800	Stainless Steel 304

**Note:** Production of Stainless Steel Grade 316 available on request

# KW-810310SS

# Heavy Duty Wheel with U Groove – Stainless Steel

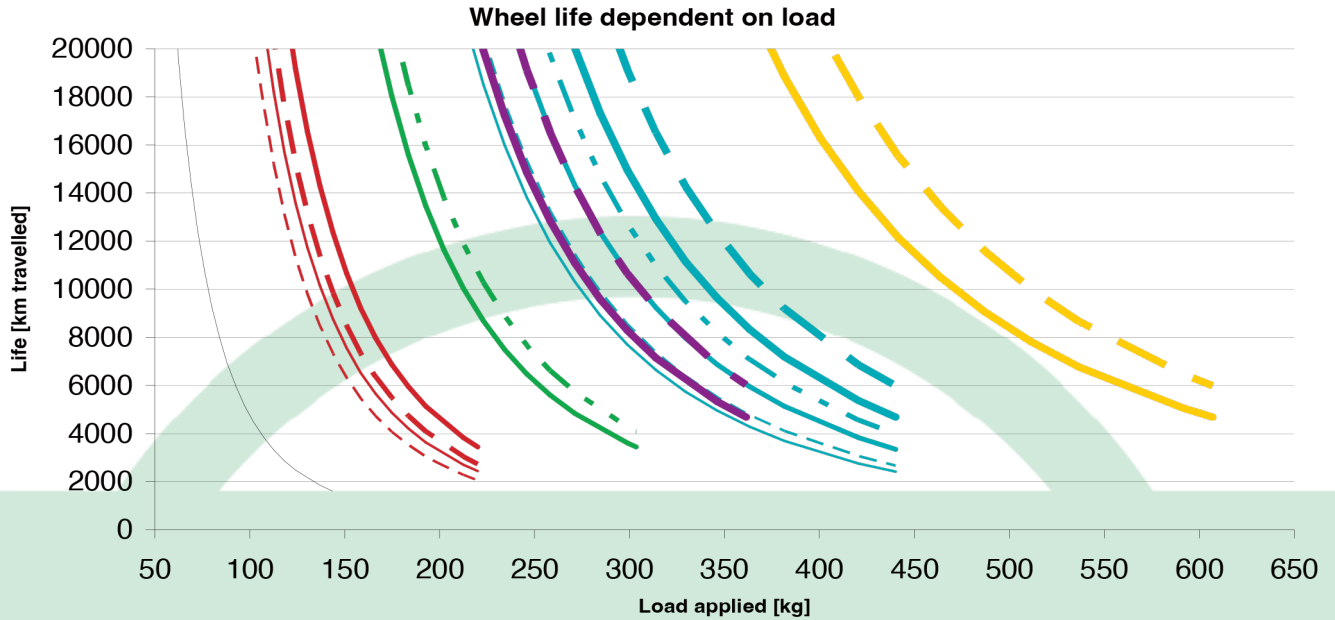

- |  |   |   |
|--|---|---|
| — KW-810310.60.16 - KW-800300V.60                    | - - - KW-810310.80.16 - KW-800300V.80                       | — KW-810310.90.16 - KW-810310.90.20 - KW-800300V.90         |
| — KW-815315.90.16 - KW-815315.90.20<br>KW-805305V.90 | - - - KW-810310.100.16 - KW-810310.100.20<br>KW-800300V.100 | - - - KW-815315.100.16 - KW-815315.100.20<br>KW-805305V.100 |
| — KW-810310.120.16 - KW-800300V.120                  | — KW-810310.120.16.3 (3mm thick groove)                     | — KW-815315.120.20 - KW-805305V.120                         |
| - - - KW-810310.140.16 - KW-800300V.140              | — KW-815315.140.20 - KW-805305V.140                         | — KW-810310.160.16 - KW-800300V.160                         |
| — KW-815315.160.20 - KW-805305V.160                  | — KW-815315.160.20.3 (3mm thick groove)                     | — KW-800300V.200  |
| — KW-805305V.200                                     | — KW-815315.200.20 - KW-805305V.200.3 (3mm thick groove)    |   |

